

CORRECTED VERSION

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
11 November 2004 (11.11.2004)

PCT

(10) International Publication Number  
**WO 2004/096091 A1**

(51) International Patent Classification<sup>7</sup>: **A61F 2/06**

(21) International Application Number:  
PCT/EP2004/004486

(22) International Filing Date: 28 April 2004 (28.04.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0309616.1 28 April 2003 (28.04.2003) GB

(71) Applicant (for all designated States except US): **ANGIOMED GMBH & CO. MEDIZINTECHNIK KG**  
[DE/DE]; Wachhausstrasse 6, 76227 Karlsruhe (DE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **DORN, Jürgen**  
[DE/DE]; Küstriner Weg 2, 68809 Neulussheim (DE).

(74) Agent: **HOFFMANN-EITL**; Arabellastrasse 4, 81925  
München (DE).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,

CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,  
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

(48) Date of publication of this corrected version:


10 March 2005

(15) Information about Correction:

see PCT Gazette No. 10/2005 of 10 March 2005, Section II

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **LOADING AND DELIVERY OF SELF-EXPANDING STENTS**

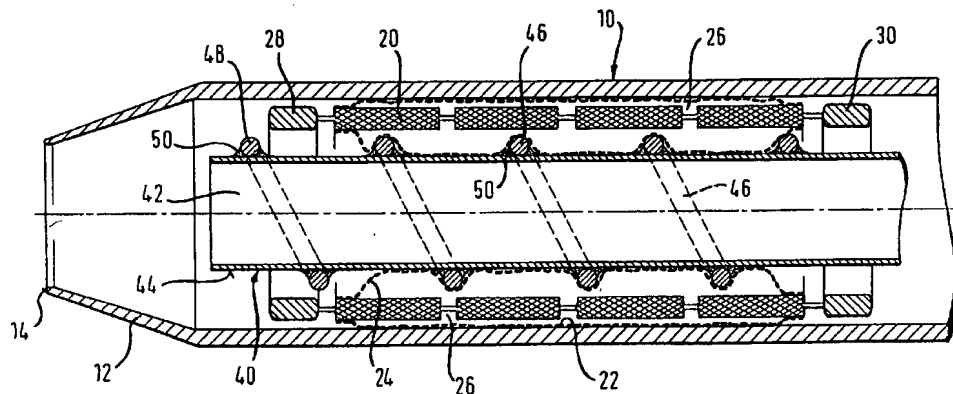

(57) Abstract: A covered self-expanding stent (20) can be restrained against axial movement with a pusher (40) within the lumen of the stent that carries a spiral of wire (48) that provides protrusions that are accommodated within a lumenal covering layer (24) radially inside the stent body. The protrusions distribute the stress over the full length of the stent. The pusher can be removed from the stent lumen by "unscrewing" the spiral relative to the covering layer (24). When the stent expands, the pusher can be withdrawn proximally, out of the stent lumen, without any need for rotatory movement.

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
11 November 2004 (11.11.2004)

PCT

(10) International Publication Number  
**WO 2004/096091 A1**

(51) International Patent Classification<sup>7</sup>: **A61F 2/06**

(21) International Application Number:  
PCT/EP2004/004486

(22) International Filing Date: 28 April 2004 (28.04.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0309616.1 28 April 2003 (28.04.2003) GB

(71) Applicant (for all designated States except US): **AN-GIOMED GMBH & CO.** [DE/DE]; Medizintechnik KG, Wachhausstrasse 6, 76227 Karlsruhe (DE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **DORN, Jürgen** [DE/DE]; Küstriner Weg 2, 68809 Neulussheim (DE).

(74) Agent: **HOFFMANN-EITL**; Arabellastrasse 4, 81925 München (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **LOADING AND DELIVERY OF SELF-EXPANDING STENTS**

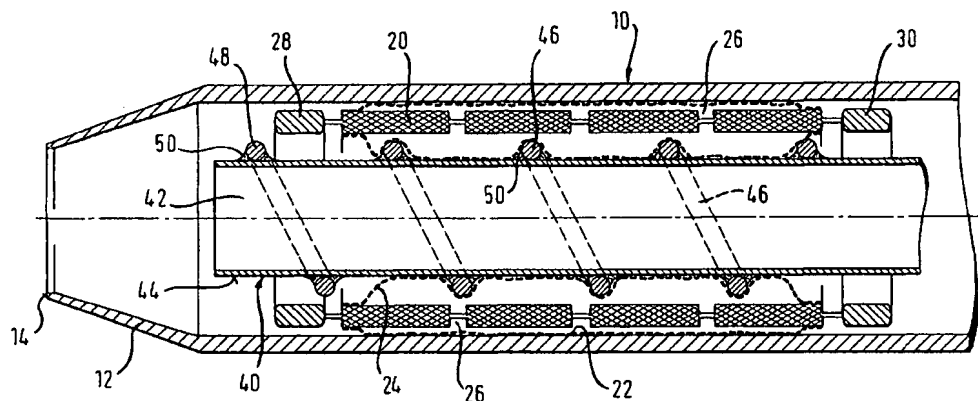

(57) Abstract: A covered self-expanding stent (20) can be restrained against axial movement with a pusher (40) within the lumen of the stent that carries a spiral of wire (48) that provides protrusions that are accommodated within a luminal covering layer (24) radially inside the stent body. The protrusions distribute the stress over the full length of the stent. The pusher can be removed from the stent lumen by "unscrewing" the spiral relative to the covering layer (24). When the stent expands, the pusher can be withdrawn proximally, out of the stent lumen, without any need for rotatory movement.

Loading and delivery of self-expanding stents

This invention relates in one aspect to a method of loading a self-expanding stent into a delivery sheath, in which the stent in a radially confined delivery configuration is advanced axially into the sheath for delivery to a stenting site in which the sheath is withdrawn to release the stent for radial expansion. In another aspect, the invention relates to a self-expanding stent within a percutaneous transluminal delivery catheter that includes a sheath that withdraws proximally to release the stent at a stenting site, and a pusher within the sheath that retains the stent at the site during withdrawal of the sheath.

EP-A-788 332 discloses a self-expanding braided metallic stent tube and a delivery system that includes a soft annulus within the stent lumen that deforms and mechanically engages with the mesh of the stent for restraining the stent from axial movement relative to the inner catheter of the delivery system, during axial movement of a sleeve surrounding the stent. The disclosure of EP-A-596 145 is similar.

EP-A-836 447 discloses a system for delivering a self-expanding stent, in which a stopper ring on an inner catheter abuts the proximal end of the stent tube during proximal withdrawal of a sheath which surrounds the stent.

The number of materials that are biologically compatible, and available for making stents, are comparatively few. One preferred material is stainless steel. One can make stainless steel stents that are plastically deformed when they are expanded radially at the stenting site. One convenient way to expand such stents is by a balloon at the distal end of a balloon catheter. Otherwise, one can design a stainless steel

stent to expand elastically when released at a stenting site. Typically, this is achieved by proximal withdrawal of a sheath on the distal end of the delivery catheter, that withdraws proximally to release the stent progressively, starting at its distal end.

Another suitable material is the nickel titanium shape memory alloy known under the trade mark NITINOL. Such stents are typically loaded into a delivery system at a low temperature when the crystal structure of the material is martensitic, and with a memory of a radially expanded shape, characteristic of a higher temperature austenitic crystalline structure. Remarkably, the nickel titanium material is biologically compatible and the martensite/austenite transformation occurs between room temperature and body temperature.

This invention is particularly applicable to self-expanding stents, irrespective of the mechanism of resilient radial expansion at the stenting site. However, the present Applicant has particular experience with nickel titanium shape memory alloy stents and the particular embodiments described below are based on such materials.

The tubular envelope of a stent usually has apertures through its wall thickness to permit radial expansion. Thus, an uncovered or "bare" stent has a tube wall that is normally liquid-permeable. However, there are many occasions when a stent with a liquid-impermeable wall that is not apertured would be desirable. To meet these needs, a family of "covered" stents have been developed. Applicant has particular experience with stent tubes provided with a covering of expanded polytetrafluoroethylene (ePTFE). Typically, the stent tube is covered by luminal and abluminal covering layers of ePTFE, which are bonded to each other through the apertures in the stent tube wall.

During manufacture of stents and delivery systems, attention must be paid to sterility. Specifically, one needs procedures for loading a covered stent into a catheter delivery system that will allow sterile conditions to be maintained, or at least thereafter achieved.

Typically, to introduce a covered self-expanding stent into a catheter delivery system, a tool needs to be provided that compresses the covered stent radially inwardly, down to a diameter which is smaller than the available diameter of the lumen of the delivery system that is to receive the compressed covered stent. Clearly, any structure within the lumen of the stent that resists further inward compression is better avoided, when the objective is to compress the stent radially inwardly as much as the system will tolerate, so as to keep the outside diameter of the delivery system at its distal tip as small as possible.

However, the stent has to be maintained at the stenting site during proximal withdrawal of the surrounding sheath, for progressive release of the stent at the stenting site. If there is no structure within the lumen of the stent, then the entire stress imposed on the stent, to prevent it moving proximally with the proximally withdrawing surrounding sheath, has to be carried on the proximal end annulus of the compressed stent. Often this is not really a problem, especially when the stent is short and not particularly highly compressed radially inwardly, and especially when friction between the compressed stent and the surrounding sheath can be brought to a particularly low value.

Nevertheless, it is important for management of fatigue resistance to avoid imposing on any point of the stent tube a level of stress that is higher than the designed maximum. A stent tube made of metal is susceptible to fatigue failure, if only because it is subject to cyclic stress at the frequency of the heartbeat of the body in which it is

installed. For this reason, regulatory authorities require stringent fatigue performance standards which impose on manufacturers of stents and delivery systems an onerous burden to avoid any unforeseen stresses on the stent tube.

The state of the art contains numerous suggestions to use an element within the lumen of the stent to restrain the stent from proximal withdrawal when the surrounding sleeve is withdrawn proximally. However, these systems are of interest only for bare stents, because they rely upon mechanical interaction between surfaces on the stent pusher within the stent lumen, and boundary surfaces of apertures within the wall thickness of the stent tube.

It is an object of the present invention to load self-expanding covered stents into catheter delivery systems which offers better management of stress within the stent tube, facilitates quality control and maintenance of sterile conditions, and is applicable to a range of stent tube designs.

According to one aspect of the present invention, there is provided a method of loading a self-expanding stent into a delivery sheath, as defined in claim 1 below.

According to a second aspect of the present invention there is provided a self-expanding stent within a percutaneous transluminal delivery catheter, as defined in claim 3 below.

By distributing over the full length of the stent tube lumen the forces which necessarily have to be imposed on the stent in order to:

1. load it into a delivery sheath; and/or
2. restrain it from proximal movement during proximal withdrawal of the delivery sheath during placement of the stent at the stenting site

one can manage the distribution of stress within the stent tube so that it is distributed more or less homogeneously, rather than concentrated at one end of the stent tube. By using the covering of the stent as a link in the chain of stress distribution from the pusher to the sheath, one can further avoid any point at all within the metal stent tube which is subject to stress at a level higher than a prescribed design maximum. By their nature, stent coverings are more flexible than the stent tube itself, so have the capability to distribute stress from a point on a metallic stent pusher to an area, or volume, of the material of the stent tube.

Furthermore, the flexibility of the stent covering is sufficient to accommodate the protrusions of the pusher, irrespective where they lie in relation to the apertures of the stent lumen. With the present invention, there is no need to align in any way the protrusions of the stent pusher with the apertures of the stent lumen. Thus, a further technical effect of the present invention is valuable simplicity and speed of operation in loading a range of different covered stent products into their corresponding delivery systems.

Yet a further advantage of the present invention is that the stent pusher needs no undercut or rebated surfaces to achieve its effect, and the pusher has an outside diameter which is smaller than the inside or luminal diameter of the stent tube. These factors give greater reassurance that, when the stent has been placed, and the pusher has to be withdrawn from the stent lumen, there will be no inadvertent or unintended snagging of surfaces of the pusher on surfaces of the covered stent, or indeed of any bodily tissue that might impinge on the surfaces of the stent pusher after it has been withdrawn proximally out of the stent lumen.

Of particular interest in the present invention is a stent pusher with protrusions arranged helically. Such protrusions will achieve the desired pushing effect when the pusher is subject to axial stress. However, arranging the protrusions helically would allow the pusher to be withdrawn from the stent lumen, even while the stent is within the sheath of the delivery system, simply by "unscrewing" the shaft of the pusher until the helical protrusions emerge, by continued rotation of the pusher relative to the stent, out of the lumen of the stent. In this way, one can employ the stent pusher of the present invention as part of a system for loading a covered stent into a sheath, but then remove the pusher, and pass the sheath stent assembly onwards for incorporation into a delivery system which will use an entirely different stent pusher.

For a better understanding of the present invention, and to show more clearly how the same may be carried into effect, reference will now be made to the accompanying drawings, in which:

- Fig. 1 is a side view of a tool for loading a covered self-expanding stent into a sheath;
- Fig. 2 is an enlarged view of the distal end (II) of the tool of Fig. 1; and
- Fig. 3 is an axial diametral section through the distal tip of a stent delivery system which embodies the present invention.

Fig. 3 shows only the distal tip of the delivery system, but the remainder of the system is not part of the contribution which the present invention makes to the art and, in any event, is familiar to those skilled in this art. The basic components of a conventional delivery system for a self-expanding stent are an inner catheter and an outer sheath,



the purpose of the outer sheath being to confine the self-expanding stent radially, to the small radius delivery configuration, until its release at the site of stenting. The purpose of the inner catheter is to restrain the stent from proximal movement with the sheath, while the sheath is being withdrawn proximally.

Looking at Fig. 3 of the drawings, the outer sheath 10 of the delivery system has an integral tapered tip 12 which narrows down to an end ring 14 of a diameter appropriate to receive a guidewire (not shown). Confined within the sheath is a covered stent of which the structural foundation is a stent body 20 which is an apertured tube of nickel titanium shape memory alloy. The stent is covered by an outer layer 22 of ePTFE on the abluminal surface of the stent body, and a covering layer 24 of ePTFE on the luminal inner surface of the stent body 20, with the inner and outer layers 24 and 22 being fused together where they can be pressed together within the apertures 26 of the stent body.

Between the luminal and abluminal surfaces of the stent body 20 is a wall thickness of the metallic stent material annulus. This annulus lies between the luminal and abluminal major surfaces of the stent body and, in the specification, we use the terminology "envelope" to indicate the generalised surfaces of the luminal and abluminal major wall surfaces of the stent body. Thus, the outer layer 22 lies outside the abluminal envelope stent body 20, except where it protrudes into the apertures 26 for fusing with the inner layer and, likewise, the inner layer 24 lies radially within the luminal envelope of the stent body 20 except where it protrudes radially outwardly into the stent body apertures 26.

The stent body carries a ring of tantalum radiopaque markers 28 at its distal end and a second ring of radiopaque tantalum markers 30 at its proximal end. It will be appreciated that the presence of these markers may further militate against

pushing structures that bear against the end surface of the stent to be deployed.

The inner catheter 40 defines a guidewire lumen 42. Conveniently, the inner catheter 40 is based on a stainless steel hypo tube. This of course endows the entire delivery system with substantial pushability, but the hypo tube can also be made remarkably flexible for the desired trackability of the system through particularly tortuous bodily lumens. In any event, if stainless steel is not flexible enough for the distal zone of the delivery system, then it would be feasible to build the inner catheter 40 from other more flexible materials such as particular polymers.

The stent delivery system can be arranged as an over the wire system with a full length guidewire lumen, or a rapid exchange system with a guidewire lumen only in a distal zone of the system. The outer sheath 10 can be withdrawn by a full length outer catheter or a pull wire within a shaft lumen. For an example of delivery systems of the present Applicant, see WO 03/003944 and PCT/EP2004/000248.

The inner catheter has an abluminal surface 44 which carries on it a wire 46 arranged as a helix so as to provide a plurality of protrusions (at least when seen in section as in the drawing) on the abluminal surface 44. In the illustrated embodiment, the wire is of stainless steel, fixed to the stainless steel tube 40 by deposits 50 of a bonding material which could be a weld bead or a suitable adhesive.

In any event, as can be seen on the drawing, when the stent body is radially inwardly compressed down onto the inner catheter 40, the inner ePTFE layer 24 deforms to accommodate the protrusions 48, but the protrusions 48 do not reach radially outwardly as far as the luminal envelope of the stent body 20.

In use, when the illustrated distal tip zone has been brought to the site of stenting, the outer catheter 12 is carefully and progressively withdrawn proximally so that the tip stretches and slides over the outer ePTFE layer 22 of the stent, progressively releasing the stent, starting at its distal end near the markers 28.

As the stent progressively expands, the inner ePTFE layer 24 moves radially outwardly away from the protrusions 48 until, with complete withdrawal of the tip 12 proximally beyond the proximal ring of radiopaque markers 30, the stent is fully released. It will be appreciated that there is then a substantial annular gap between the lumen of the expanded stent and the envelope containing the protrusions 48, enabling the inner catheter 40 also to be withdrawn proximally from the lumen of the stent without any snagging of the inner catheter 40 on any part of the stent.

It will be appreciated that, for loading a stent into a sheath, an analogous sequence of steps may be performed, with radially inward compression of the stent body down onto the protrusions 48 of a loading tool which has a shape in section analogous to that of the inner catheter 40. Once the stent has been so compressed, a suitable sheath can be offered up to one end of the compressed stent tube, and then the stent can be urged axially into the sheath by imposing an axial force on the line of protrusions 48 through the tube 40 on which they amounted, so that this force is transferred from the protrusions 48 to the inner layer 24 and thence to the stent body 20 and the outer layer 22, so that the entire covered stent device is urged by the protrusions 48 into the receiving sheath.

A particular advantage of the helical structure of protrusions 48 as shown in the drawing is that the pusher, within the stent lumen can be removed trouble-free from the lumen of the stent even when it is in a compressed

configuration within a sheath as shown in the drawing, simply by "unscrewing" the pusher from within the stent lumen.

Drawing Figures 1 and 2 show a suitable loading tool 60, long enough to push the covered stent along the full length of the outer catheter 10, after being compressed and introduced and advanced into the proximal end of the outer catheter. The tool 60 features at its distal end a radially-outwardly protruding wire spiral 62 with a configuration corresponding to that of the protrusions 48 and the inner catheter 40 (although non-corresponding configurations are also feasible). The covered stent is compressed around the protrusions 62 before the tool 60 is used to urge the covered stent by means of the protrusions 62, from the proximal to the distal end of the outer catheter.

The illustrated embodiment shows a system in which the tapered distal tip of the stent delivery system is carried on the distal end of the outer catheter. Those skilled in the art are well-aware that many proposed delivery systems feature a tapered tip on the inner catheter instead. The present invention is just as useful in such systems as it is in systems, as illustrated, with the tapered tip on the outer catheter.

The stent on which the present device operates can be an covered self-expanding stent. The stent which is the basis of the illustrated embodiment is the one that is the preferred embodiment of WO 2002/015820 which is cut from a nickel-titanium tube. However, the invention is equally applicable to other stent design philosophies, such as stents fabricated from wire (one example is the Gianturco "Z" stent made from zig zag wire rings) or other metals, such as stainless steel. The invention is particular useful for covered stents in which only the cover connects adjacent ones of a plurality of stenting rings, because the engagement of the pusher over the full length of the stent should avoid any tendency for the

stent covering to "concertina" between the stenting rings when pushed only from its trailing (usually proximal) end.

Those skilled in the art will be able to recognise from this disclosure many other ways to realise the present invention besides that described with reference to the drawings.

Claims

1. A method of loading a self-expanding stent into a delivery sheath, in which the stent in a radially confined delivery configuration is advanced axially into the sheath for delivery to a stenting site in which the sheath is withdrawn to release the stent for radial expansion at the site

characterized by the steps of

i) providing said stent as a covered stent having a stent matrix with surfaces defining luminal and abluminal envelopes spaced apart by a stent wall thickness, a covering material bonded to the matrix lying radially inside the luminal envelope

ii) providing a stent pusher within the lumen of the stent, the stent pusher having radially outwardly extending protrusions distributed along the length of the stent lumen

iii) compressing the stent radially inwardly until the protrusions deform the covering material, yet remain radially inside the luminal envelope, and

iv) advancing the compressed stent into the sheath by imposing an endwise force on the stent pusher so that the covering material transfers the pushing force from the protrusions of the stent pusher to the stent matrix.

2. Method as claimed in claim 1, including the step of arranging the protrusions helically, so that the stent pusher can be withdrawn from the lumen of the stent, inside the sheath, by unscrewing the stent pusher relative to the stent lumen.

3. A self-expanding stent within a percutaneous transluminal delivery catheter that includes a sheath that withdraws proximally to release the stent at a stenting site, and a pusher within the sheath that retains the stent at the site during withdrawal of the sheath

characterised in that

i) the pusher extends along the lumen of the stent and has radially outwardly extending protrusions distributed along the length of the stent lumen

ii) the stent is a covered stent having a matrix with surfaces defining luminal and abluminal envelopes spaced apart by a stent wall thickness, a covering material bonded to the matrix lying radially inside the luminal envelope; and

iii) the protrusions deform the covering material yet remain radially inside the luminal envelope.

4. Stent as claimed in claim 3, wherein the stent matrix is of metal and the covering is of expanded polytetrafluoroethylene.

5. Stent as claimed in claim 3 or 4, wherein the stent matrix is apertured and the covering is bonded to an abluminal stent covering layer through the apertures.

6. Stent as claimed in claim 3, 4 or 5, wherein the stent matrix is formed from a nickel-titanium shape memory alloy.

7. Stent as claimed in any one of claims 3 to 6, wherein said protrusions are the turns of a spiral.

8. Stent as claimed in any one of claims 3 to 7, with a tapered distal tip on said sheath.

9. Stent as claimed in any one of claims 3 to 7, with a tapered distal tip on said pusher, distal of said sheath.

1 / 2

Fig. 1

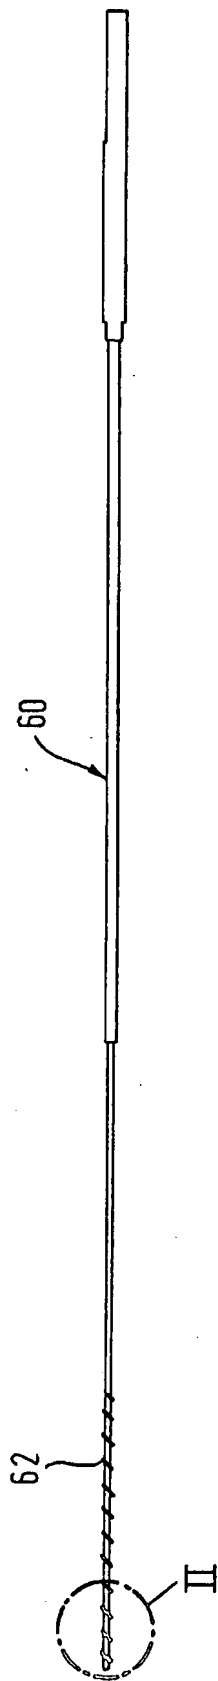


Fig. 2







Fig. 3

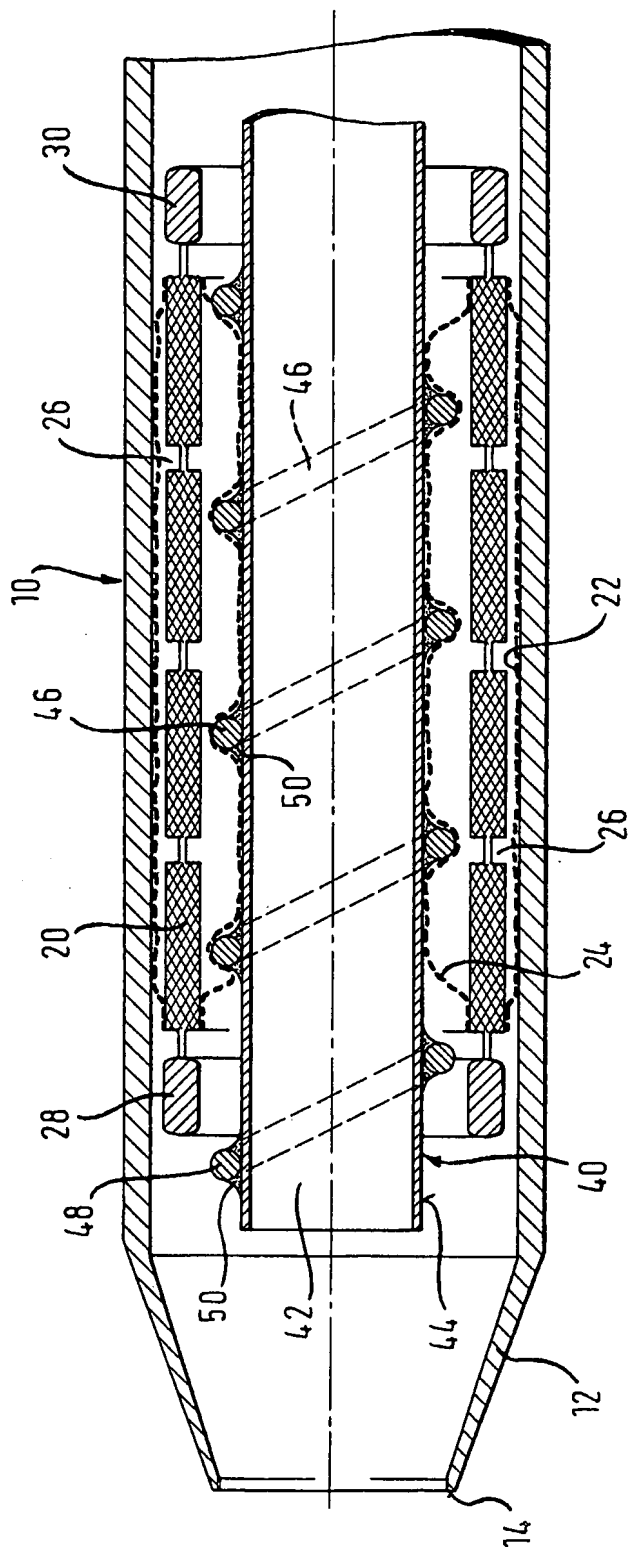

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP2004/004486

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A61F2/06

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 00/71058 A (SCIMED LIFE SYSTEMS INC) 30 November 2000 (2000-11-30) sentence 15 - sentence 16 page 3, line 17 - line 28 page 4, line 1 - line 3 page 4, line 15 page 4, line 19 - line 25 page 7, line 1 - line 10 page 6, line 3 - line 12 page 7, line 17 - line 25 page 10, line 33 - page 11, line 2 figures 2B,3A,9B	1,3,6,7, 9
A	WO 00/71057 A (SCIMED LIFE SYSTEMS INC) 30 November 2000 (2000-11-30) page 8, line 1 - line 7 figure 1 ----- -/-	4,5



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

17 September 2004

Date of mailing of the international search report

27/09/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Amaro, H

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP2004/004486

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 03/003944 A (ANGIOMED AG ; DORN JUERGEN (DE)) 16 January 2003 (2003-01-16) cited in the application abstract figure 2 -----	9
A	US 6 132 458 A (BURTON JOHN H ET AL) 17 October 2000 (2000-10-17) claim 1 figures 1,2 -----	1
A	US 6 322 586 B1 (PHILLIPS JOEL ET AL) 27 November 2001 (2001-11-27) column 6, line 39 - line 45 figures 7,8 -----	3

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP2004/004486

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0071058	A	30-11-2000	US 6607551 B1	19-08-2003
			AU 5280600 A	12-12-2000
			CA 2371780 A1	30-11-2000
			EP 1180003 A1	20-02-2002
			JP 2003500104 T	07-01-2003
			WO 0071058 A1	30-11-2000
			US 2004106977 A1	03-06-2004
WO 0071057	A	30-11-2000	AU 763781 B2	31-07-2003
			AU 5274700 A	12-12-2000
			CA 2370804 A1	30-11-2000
			EP 1185216 A1	13-03-2002
			JP 2003500103 T	07-01-2003
			WO 0071057 A1	30-11-2000
			US 6673103 B1	06-01-2004
WO 03003944	A	16-01-2003	US 2004162603 A1	19-08-2004
			CA 2451293 A1	16-01-2003
			WO 03003944 A2	16-01-2003
			EP 1404253 A2	07-04-2004
US 6132458	A	17-10-2000	CA 2451293 A1	16-01-2003
			WO 03003944 A2	16-01-2003
			EP 1404253 A2	07-04-2004
			AU 738990 B2	04-10-2001
			AU 3982099 A	06-12-1999
			CA 2317578 A1	25-11-1999
			EP 1077656 A1	28-02-2001
			JP 2002515290 T	28-05-2002
			WO 9959503 A1	25-11-1999
			US 6471718 B1	29-10-2002
US 6322586	B1	27-11-2001	CA 2396724 A1	19-07-2001
			EP 1272124 A2	08-01-2003
			JP 2004501672 T	22-01-2004
			WO 0151114 A2	19-07-2001
			US 2002052641 A1	02-05-2002